*OtterPro







info@otterdtf.com

www.otterdtf.com



VERSION: 202411

*OtterPro


OTTER DTF SYSTEM

Print, Cure, Wow with Otter DTF System!

DTF Printer / Shaker / Film / Ink Powder / Oven Dryer / Purifier Heat Press / DTF Printables

UV DTF Printer / UV DTF Consumables

www.otterdtf.com

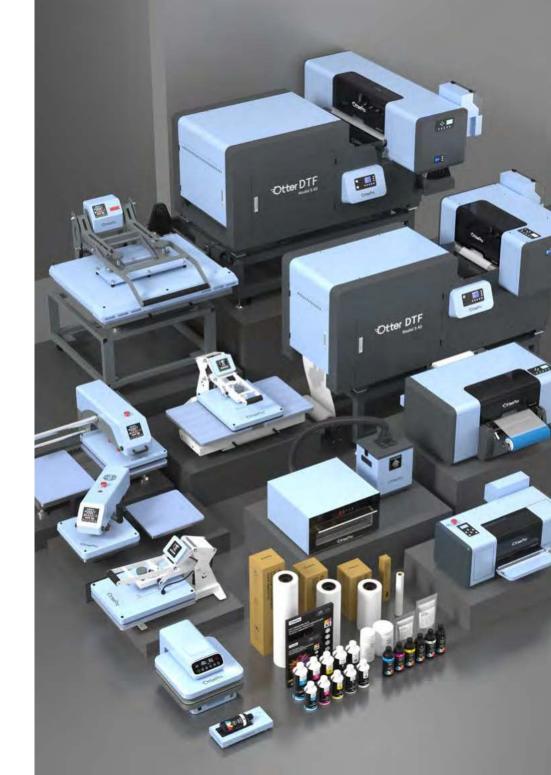






Local Services

To ensure prompt and seamless support for OtterPro DTF printer users worldwide, we've established multiple OtterPro DTF Printer local service stations across the United States, Mexico, Panama, and Europe. Our comprehensive one-stop service center covers everything from purchasing and installing DTF printers to aftersales support, training, maintenance, repairs, and more. And we're still working on establishing OtterPro DTF service stations globally.


Besides the local service stations, you can also find OtterPro DTF products in Canada, Thailand, Saudi Arabia, Dubai, and other South American countries. If you need further assistance, please feel free to contact us!

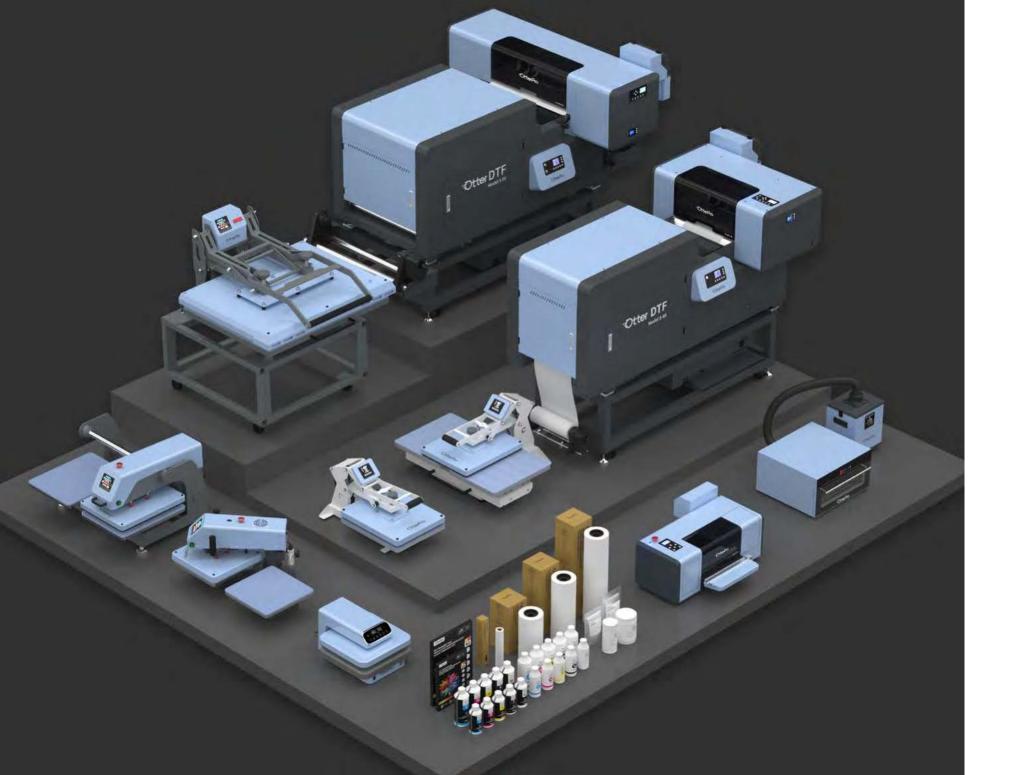

Textile DTF

Printing Solution for Soft Fabrics

OtterPro DTF printer performs amazingly well on almost all kinds of fabrics, including tshirts, safety vests, hats, masks, shoes, banners, towels, aprons, bags, slippers, PU notebooks, coasters and more.

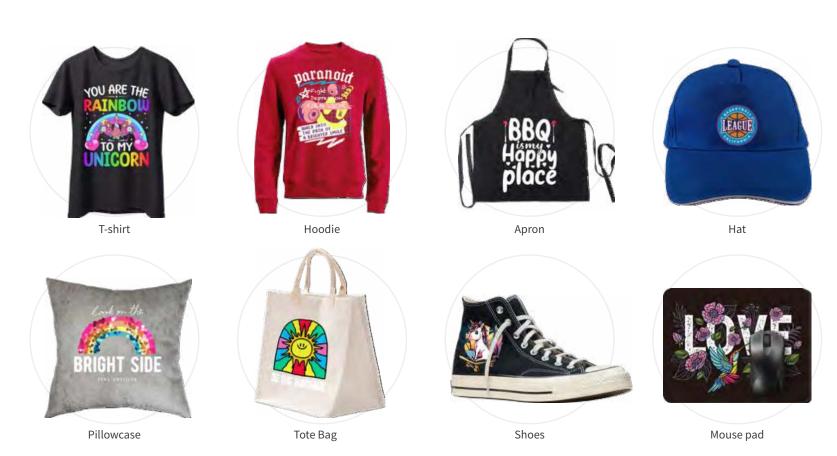





UV DTF

Printing Solution for Hard Substrates

Otter Pro UV DTF Printer produces permanent stickers that can be applied on almost hard, smooth, and even curved, cylindrical objects.

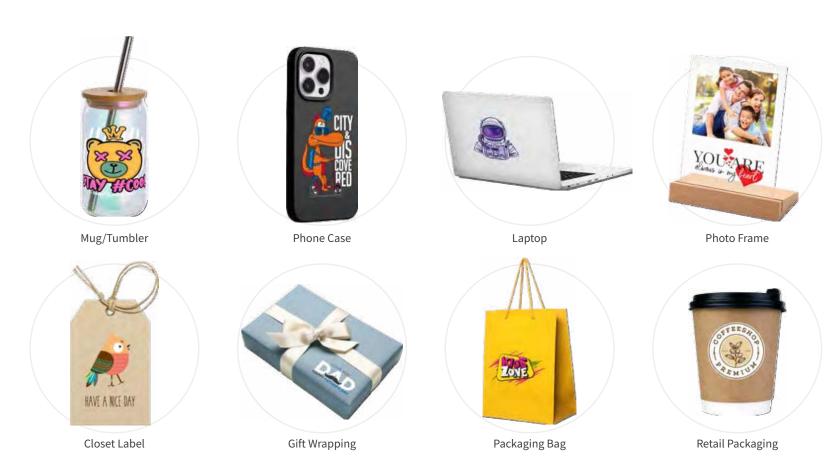

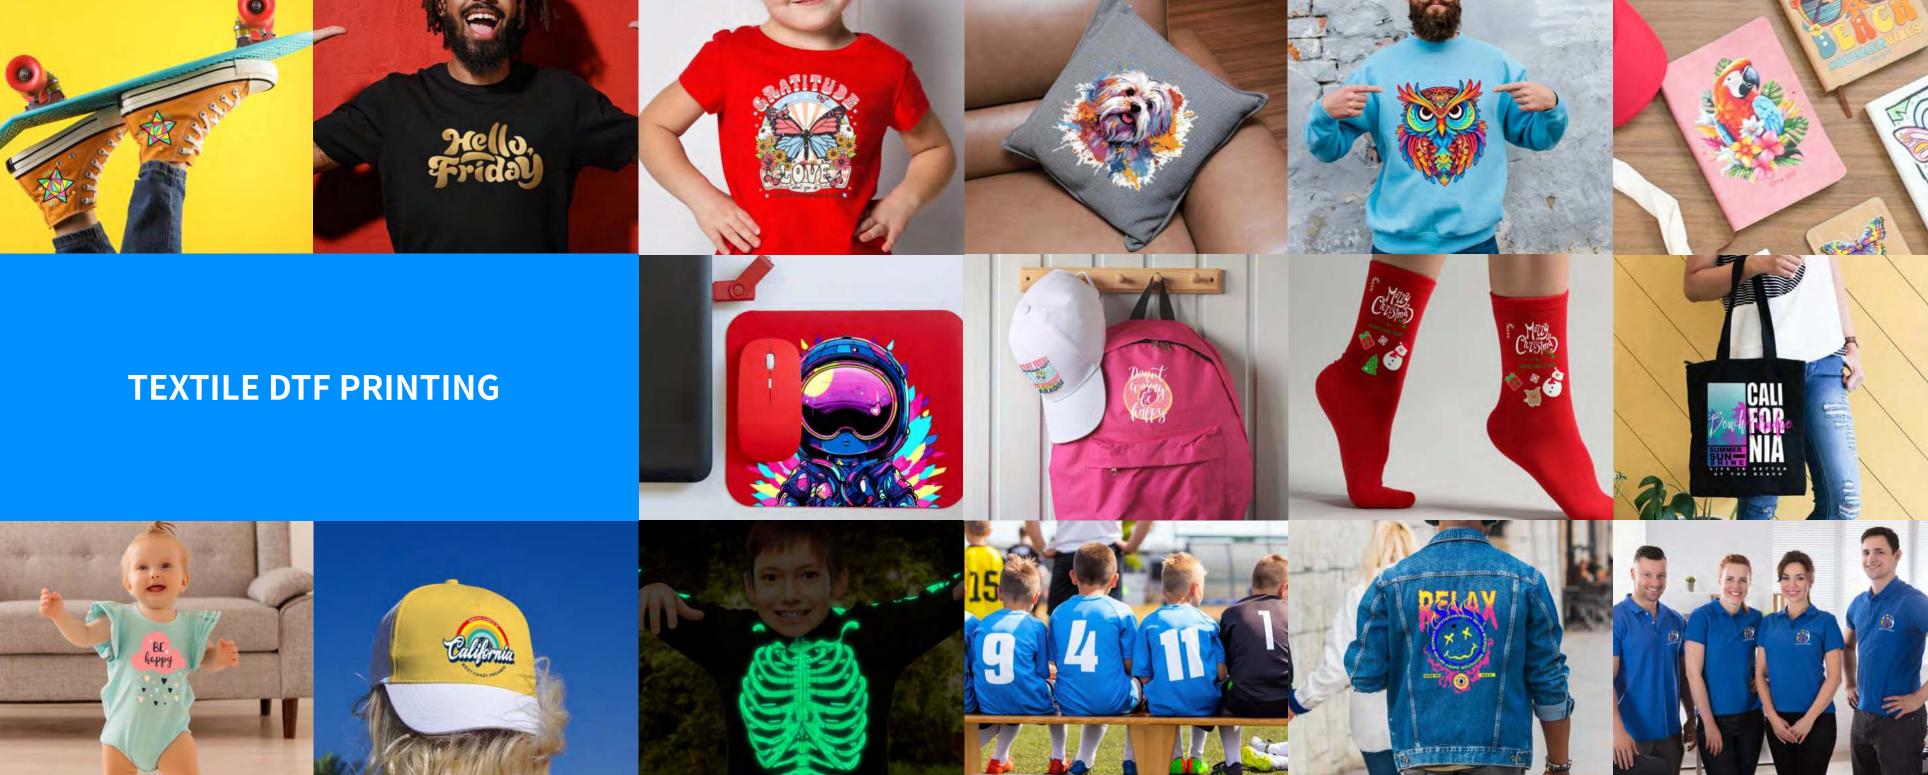



01

Use DTF Printer to print your design



04

Transfer design with OtterPro heat press

Home Use & Retailer Solution

The desktop DTF series solves home use or retailer purposes. Focus on the targeted solutions to specific needs in the DTF printing process.



)3

Melt powder using an oven dryer and purifier in a clean, fresh workspace. 02

Spread hot melt powder evenly onto the film



Mass Production Solution

Experience boundless printing options with our all-in-one DTF system—ideal for large-scale production or small-volume printing. Perfect for retailers or home makers, it integrates printing, powder shaking, heating, and purifying functions, providing efficiency and quality in a compact design. Fully automated features enhance workflow, ensuring high productivity and top-notch output. OtterPro heat presses are designed to give you high-quality prints quickly and easily. The Air Press Series Dual Station Heat Press, in particular, enhances productivity, providing consistent, professional results for mass production.







Transfer design with OtterPro dual station heat press or large format heat press



Model S 60 All-in-One Otter DTF System

The maximum print size of this large format all-in-one DTF printer is 60cm/23.6in, equipped with two advanced Epson i3200 printheads, this printer delivers faster and more precise prints. It's perfect for printing on larger garments, jeans, trade show banners, posters, and allowing mass production of custom clothing and more large scale projects.



Epson i3200 2 PCS





Note: The printer and shaker are sold as a set.

OT-AIODTF60LB	Nozzle Resolution	360npi 480npi
Epson i3200 x2	Print Speed (High-speed, Bi-direction)	720*1200dpi (4pass) Print Speed: 14m²/H 720*1800dpi (6pass) Print Speed: 10m²/H 720*2400dpi (8pass) Print Speed: 6m²/H
110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
3300W MAX±5%	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Chinese/English	Ink Stirring System	White ink automatic stirring circulation
Model S 60 DTF	Adsorption Platform	Adjustable suction platform
OtterPro RIP	Heating System	Three stages independent heating
Chinese/English/French/German/Italian/ Polish/Portuguese/Spanish	Connection Method	Gigabit ethernet port (PC must have gigabit ethernet card)
Eco textile pigment ink	System Requirements	Window 7 or above (macOS system is not supported)
H1: K+C+M+Y H2: W+W+W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
0-3 mm (75-90u)	Product Dimensions	236 x 156.5 x 141.5 cm / 92.9 x 61.6 x 55.7 in
0-600 mm / 0-23.6 in	Gross Weight(with wooden box)	581kg
ACCESSORIES: Cap Top x2, Ink Tube x4, Ribbon Cable x2, Ink Damper x2, Network Cable x1, 20ml Syringe x1, M3 Screw x12, M4 Screw x 6, Power Cord x1, Hex Key Set x1, Phillips Screwdriver x1		1.5kg
	Epson i3200 x2 110V/220V±10% 50Hz-60Hz 3300W MAX±5% Chinese/English Model S 60 DTF OtterPro RIP Chinese/English/French/German/Italian/Polish/Portuguese/Spanish Eco textile pigment ink H1: K+C+M+Y H2: W+W+W+W 0-3 mm (75-90u) 0-600 mm / 0-23.6 in	Epson i3200 x2 Print Speed (High-speed, Bi-direction) 110V/220V±10% 50Hz-60Hz Print Mode 3300W MAX±5% Operating Environment Ink Stirring System Model S 60 DTF Adsorption Platform OtterPro RIP Chinese/English/French/German/Italian/ Polish/Portuguese/Spanish Connection Method Eco textile pigment ink System Requirements H1: K+C+M+Y H2: W+W+W+W Supported Formats 0-3 mm (75-90u) Product Dimensions 0-600 mm / 0-23.6 in Gross Weight(with wooden box) Bibbon Cable x2, Ink Damper x2, Network M3 Screw x12, M4 Screw x 6.

OTF.

The DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.



Model S 40 All-in-One Otter DTF System

Model S 40 is an All-in-One DTF printer that combines printing, powder shaking, curing, and purifying in one machine. With a maximum print width of 44.8cm/17.6in, it's compatible with the standard film widths in the market, including 30cm, 33cm, 42cm and more size.



Epson i1600 2 PCS





NOTE: DTF printer can be sold separately.

Model No.	OT-AIODTF40LB	Nozzle Resolution	300npi 600npi
Printhead	Epson i1600 x2	Print Speed (High-speed, Bi-direction)	720*1200dpi (4pass) Print Speed: 3.5-5.0m²/H 720*1800dpi (6pass) Print Speed: 2.5-3.5m²/H 720*2400dpi (8pass) Print Speed: 2.0-3.0m²/H
Voltage	220V ±10% 50Hz	Print Mode	Uni-direction / Bi-direction
Power	Printer: 300W Shaker & Heating System: 2500W	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	White ink automatic stirring circulation
Printer Software	Model S 40 DTF	Adsorption Platform	Adjustable suction platform
Design Software	OtterPro RIP	Heating System	Three Stages Independent Heating
Language Options (Software)	Chinese/English/French/German/Italian/ Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	Eco textile pigment ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	H1: K+C+M+Y H2: W+W+W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm(75-90u)	Product Dimensions	220 x 100 x150 cm / 86.6 x 39.3 x 59 in
Print Width	0-448 mm / 0-17.6 in	Gross Weight(with wooden box)	380kg
Cable x1, 20ml Syringe x1	Ribbon Cable x2, Ink Damper x2, Network , M3 Screw x12, M4 Screw x 6, et x1, Phillips Screwdriver x1	Powder Capacity	1.5kg
NOTE:			

The DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.

Powder Shaking System




Simple & Easy to Operate

Printing, Shaking & Curing Integrated

Suitable for High & **Low-volume Production**

All-in-One Automated DTF System

Equipped with sensors, the automated system enables one-touch controls for automatic printing, powder shaking, drying, and film winding.

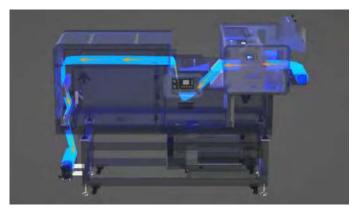



Control Panel

Manage the speed, power and temperature of the powder shaking and drying system with this intuitive control panel.



Auto Powder Recycling System It can effectively improve the utilization rate of hot melt

powder and minimize waste. In addition, it saves the hassle of shaking powder by hand, allowing the powder to be spread more evenly on the film.



Drying SystemEquipped with five heating tubes and a larger drying area, our drying system ensures more uniform heating for your project, delivering superior outcomes.



Auto Take-up Reel System

With the automatic take-up reel system, you can free up your hands in the final production stage, achieving intelligent and secure film winding.



Built-in Fans

After the printed film is baked in the oven, the built-in fans accelerate film cooling and improve work efficiency.



Integrated Purifier

The air and oil purifier system can automatically treat smoke and oil and promote well-being and productivity. (No need to replace the filter cotton)

Advantages of Model S Series Printers



Stable & Quiet

DC motor controller Double silent circular guide rails Steel body



Safe & Intelligent

White ink automatic circulation stirring system Automatic cleaning system Alarm system Peristaltic pump




High Efficiency

Three heating stages Adjustable suction system Multi-language RIP software



Consistent Print Quality. Increased Efficiency. Cost Savings. Peristaltic pump with moderate pressure and great gas sealing to protect the printer head.

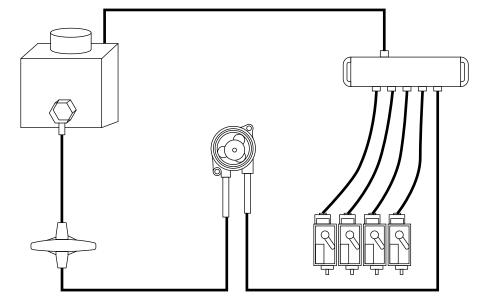


Ink Supply System

Clear ink markings save the hassle of pouring the wrong ink. The built-in alarm sensor reminds you to add ink in time, minimizing damage to the printer.




Double Silent Circular Guide Rails

Enhance operational stability with minimal noise.

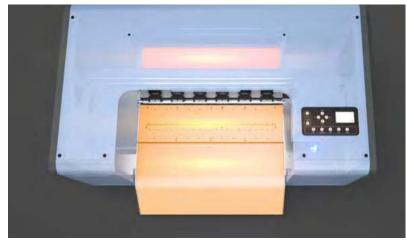

Three-stage Heating System

Accelerate DTF Ink drying speed on the film to guarantee optimal image quality before applying powder.

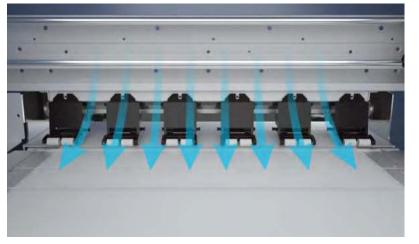

Adjustable Vacuum Suction Platform

Deliver precise color printing with no deviations, ensuring a flat and seamless film output.

17



Model M 30 OtterPro DTF Printer

Model C 30 is a compact, desktop DTF printer perfect for home use and workshop. The maximum print size is 30 cm/11.8in, ideal for most small business needs. It's equipped with an Epson F1080 printhead for stable and precise prints. Plus, it also comes with a handy cutter that makes film cutting easier.



Epson XP600(F1080) 1 PCS



Print Width 0-300mm/11.8in Max





Convenient

Simple operation Stable performance Easy to maintain One-stop consumables





Safe & Intelligent

Automatic cleaning system White ink alarm system Peristaltic pump



High Efficiency

Front stage heating Adjustable suction system Multi-language RIP software

Model No.	MODELM30LB	Print Accuracy	1440dpi
Printhead	Epson XP600(F1080) x1	Print Speed	720*900dpi (4pass) Print Speed: 4m²/H 720*1080dpi (6pass) Print Speed: 2m²/H 720*1400dpi (8pass) Print Speed: 1.2m²/H
Voltage	110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
Power	300W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Semi-automatic white ink stirring
Printer Software	Model M 30 DTF	Adsorption Platform	Adjustable suction platform
Design Software	OtterPro RIP	Heating System	Front stage heating
Language Options (Software)	Chinese/English/French/German/Italian/ Polish/Portuguese/Spanish	Connection Method	3.0 USB cable
Ink Type	Eco Textile Pigment Ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	H1: K+C+M+Y+W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm(75-90u)	Printer Specification	78.5 x 70.5 x 39.5 cm / 30.9 x 27.7 x 15.5 in / 37kg
Print Width	0-300 mm / 0-11.8in	Package Dimension	103.5 x 48 x 54.5 cm / 40.7 x 18.8 x 21.4 in / 50 kg

ACCESSORIES:

Ink Damper X3, Cap Top X1, Ink Pump x1, Ribbon Cable X2, Sensor Limit Switch x1, Ink Tube X1, Peristaltic Pump X1, Syringe X1, Bubble Level x1, Hex Key Set X1, Phillips Screwdriver X1, M4 Screw Set X1, Encoder Strip X1, Glove X2, Wiper Blade X1

IOTF:

The DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.

Tri-layer A3 DTF Dryer Pro & Air Purifier

Item No.	OT-DRYA3LB (Dryer)	OT-FLLB (Purifier)	Voltage	220V / 110V 50~60Hz
Power	1450W MAX±5%	150W MAX±5%	Temp. Range	104-302 °F (40-150°C)
Size	544*603*303mm	365*325*525mm	Time Range	1-60min
Weight	14.5 kg	9.5 kg	Film Size	300 x 420mm / 11.8 x 16.5 in





Even Heating

The desktop DTF dryer features a hot air circulation design that ensures even heating and melting powder, delivering crisper, more durable and vibrant prints.

Better Results: The upgraded heating tunnel prevents oiling with a better curing effect

Max. temperature up to 150°C



OtterPro portable purifier provides you a fresh air throughout your workspace. Easy to carry, simple to use. Experience an atmosphere that promotes well-being and productivity with our efficient air purification system.



High Efficiency

The maximum curing size is 30x42cm/11.8x16.5in, its three-layer design dries 3 sheets of A3 or 6 sheets of A4 film at a time, making it an efficient choice for DTF projects.

















Model C 30 OtterPro UV DTF Printer

Model C 30 is a UV DTF printer that combines printing and lamination in one machine. No heat press is required, apply your stickers onto wood, metal, plastic, glass, acrylic, paper and almost any smooth, hard, cylindrical objects with ease!





Epson i3200-U1 HD 1 PCS



0-300mm/11.8in Max



Convenient

Simple operation Stable performance Easy to maintain One-stop consumables



Safe & Intelligent

White ink automatic circulation system Automatic cleaning system Alarm system Peristaltic pump



High Efficiency

Adjustable heating rollers Built-in suction system Multi-language RIP software

Model No.	MODELC30LB	Nozzle Resolution	300npi 600npi
Printhead	Epson i3200-U1 HD x1 (8 Colors)	Print Speed	960*900dpi (6pas s) Print Speed: 3.5-5.0m²/H 960*1200dpi (8pass) Print Speed: 2.5-3.5m²/H
Voltage	110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
Power	410W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	White ink automatic circulation
Printer Software	Model C 30 UV DTF	Printhead Maintenance	Fully atomatic cleaning, ink scraping, moisturizing
Design Software	OtterPro RIP	Heating System	Adjustable heating rollers
Language Options (Software)	Chinese/English/French/German/Italian/ Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	UV Ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	K+C+M+Y+W1+W2+V1+V2	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Printing Method	A complete white ink, color, varnish hierarchical order printing	Printer Specification	96 x 98 x 45 cm / 37.7 x 38.5 x 17.7 in / 75kg
Print Width	0-300 mm / 0-11.8 in	Package Dimension	112 x 112 x 63 cm / 44 x 44 x 24.8 in / 95kg

IOTF:

The UV DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.

·OtterPro



Epson i3200-U1 HD Printhead

The unique printhead design features 8 channels for 4 colored inks, 2 white inks, and 2 varnishes, delivering vibrant colors with faster and more accurate alignment.




Compact & Desktop

Compact desktop design, no extra stand required, ideal for small batch production at home or workshop.



Adjustable Heating Rollers


Ensuring precise and uniform heat distribution to achieve a bubble-free laminating effect.

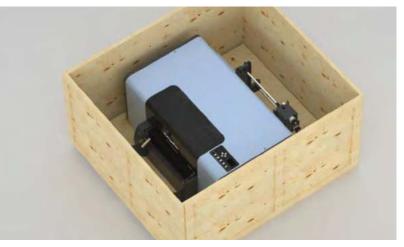

Integrated Printing & Lamination

Model C 30 integrates printing, curing, and laminating in a single process. No heat press and cutter required to create permanent stickers for your projects. (Extra protection for integrity and safe transport)

OtterPro Multi-language RIP Software

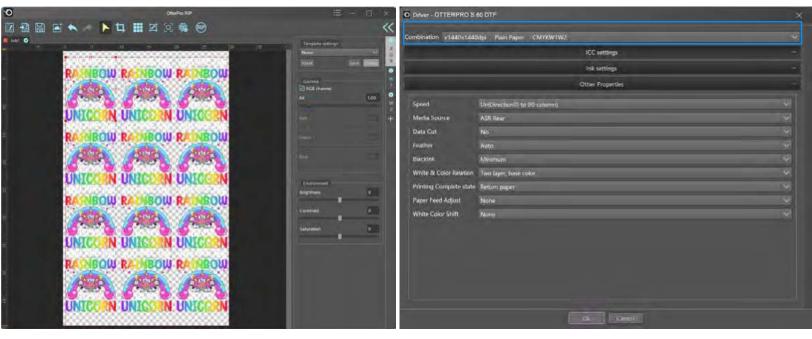

Auto Layout

Batch printing with high efficiency



OtterPro RIP Software

This software significantly boosts the productivity of DTF printing projects! It features a simple yet powerful interface, enabling you to effortlessly master image editing and design. Moreover, it supports multi-image automatic layout and duplicate printing, greatly enhancing work efficiency. The superior color output ensures DTF printers achieve "what you see is what you get" results!

Customized ICC Profiles

Streamlining your workflow for optimal productivity.

You don't need to select a channel!

Skip configuring a specific channel in your Photoshop software for your current print job. Just save your file in PNG transparent format, export it, and print directly. This saves time and eliminates hassle, allowing for easy management of your software.

Applicable to all OtterPro Printer Systems

- ⊗ Model S 60 DTF
- ⊗ Model S 40 DTF
- ⊗ Model M 30 DTF
- ⊗ Model C 30 UV DTF

25

Autopress Max Heat Press



Item No.	OT-AUPB3838FLB	Temp. Range	40-205° C(104-401° F)
Power	1200W	Time Range	1-999 seconds
Voltage	230V/120V 50~60Hz	Printable Articles Max	38x38cm / 15x15in





One Touch Mode

Just touch to repeat! Batch personalization has never been simpler with a single touch.













Retracting Drawer

Effortless and elegant handle design that saves space; the retracting drawer offers you more room for easy prep

Intelligent Pressure

For substrates up to 2 cm thick, perfectly Redesigned for unmatched consistent pressure every time, with no guesswork. efficiency and even heating with 15"x 15"heating platen.


Premium Heating Element

Unmatched Clarity and Convenience

Discover the ease of an expanded screen for effortless navigation, visualization, and settings adjustment.
Create more with a timer that extends up to 8 minutes for larger projects.

Clamshell Heat Press

Specially designed for DTF printing! Unlike the previous horizontal version, this 40x50cm/16x20inch vertical heating platen design is more suitable for garment printing. The uniformly heating platen ensures exceptional printing results every time, making it an excellent choice for a DTF heat







Premium Heating Element

The Heat Press features an even heating platen board, which is essential for ensuring consistent results when heat transfers onto your substrates.

Vertical Heating Platen

Ideal for T-shirt printing

Item No.	OT-PB3838MDLB	OT-PB4050SMDLB	OT-PB4060MDLB
Heat Platen	38x38cm / 15x15in	40x50cm / 16x20in	40x60cm / 16x24in
Power	2000W /1300W MAX±5%	2200W /1600W MAX±5%	2400W /1800W MAX±5%
Voltage	220V / 110V 50~60Hz		
Temp. Range	0-250°C (0-482 °F)		
Time Range	0-999 seconds		

Optional Configurations

Manual

X Slide-Out Drawer X Auto-Open

Drawer

✓ Slide-Out Drawer X Auto-Open

Auto-Open


✓ Slide-Out Drawer ✓ Auto-Open

Large Format Heat Press

This industrial oversized heat press is designed for printing larger projects, meeting batch printing needs in your custom garment business. When paired with DTF printing technology, it enables not only custom logo printing on t-shirts but also full print customization on garments.



Item No.	OT-PB6080DLB	OT-PB80100DLB
Heat Platen	60x80cm / 24x32in	80x100cm / 32x40in
Power	6000W MAX±5%	6600W MAX±5%
Voltage	380V 50Hz	
Temp. Range	0-250°C (32-482 °F)	
Time Range	0-999 seconds	



Premium Heating Element

The Heat Press features an evenly heating platen board, which is essential for ensuring consistent results when heat transfers onto your substrates.



High Efficiency

Unlike a small-format heat press, this heat press can print dozens of photo frames, ornaments, and even 4 t-shirts at the same time, significantly enhancing heat transfer efficiency.

With its an breaker, it operation.



Oversized Heating Platen

It has an oversized heating platen, suitable for making full printing on large creations, like towels, blankets, tablecloths, pants, banners and more.



Stable & Safe

With its anti-scald cover and air circuit breaker, it provides enhanced safety during operation.

Semi-Automatic Double Station Heat Press Machine

Double the efficiency of your DTF heat transfer projects with our dual-station design. Now, you can do the prep work while printing, saving both time and effort!







Safety

Built-in Cooling System Overload Protection Emergency Stop Overheat Protection Protective Relay



Even Heating

Precision Cut Forging



Convenient


Ease of Use
Touch-screen Design
Ideal for T-shirt Printing



Item No.	OT-DSPB4050LB
Heat Platen	40x50cm / 16x20in
Power	2200W /1600W MAX±5%
Voltage	220V / 110V 50~60Hz
Temp. Range	0-250°C (0-482 °F)
Time Range	0-999 seconds



Smooth Sliding Design



Premium Heating Element

20

Air Press Dual Station Swing-away Heat Press

This air-operated heat press uses air pressure to apply consistent, uniform heat and pressure to your substrates. With its swing-away and double-station designs, you can prepare your next project while one is being printed, saving you time and effort!



High Efficiency

Dual Station Swing-away Design Air-operated Auto Press & Release

Premium



Safety

Built-in Cooling System Overload Protection Emergency Stop Overheat Protection Protective Relay Dual Buttons for Safer Operation

Convenient Construction


Aluminium Die Casting Quick Heat-Up Even Heating Precision Cut Forging



Ease of Use Touch-screen Design Ideal for T-shirt Printing

tem No.	OT-DQSPBY3838LB	Voltage	220V / 110V 50~60Hz
Heat Platen	38x38cm / 15x15in	Temp. Range	0-250°C (0-482 °F)
Power	2000W /1300W MAX±5%	Time Range	0-999 seconds







Swing-away Design

Premium Heating Element

Automatic Pneumatic System

Air Press Dual Station Slide Heat Press

Maximize your heat transfer productivity and efficiency with this air-operated heat press! Slide, press, and repeat—batch personalization has never been



High Efficiency

Dual Station Smooth Sliding Design Air-operated Auto Press & Release



Safety

Built-in Cooling System Overload protection Emergency Stop Overheat Protection Protective Relay Dual Buttons for Safer Operation



Premium


Aluminium Die Casting Quick Heat-Up Even Heating Precision Cut Forging



Convenient

Ease of Use Touch-screen Design Ideal for T-shirt Printing


Item No.	OT-QSH4050LB	Voltage	220V / 110V 50~60Hz
Heat Platen	40x50cm / 16x20in	Temp. Range	0-250°C (0-482 °F)
Power	2200W /1600W MAX±5%	Time Range	0-999 seconds







Premium Heating Element



Automatic Pneumatic System

Model S 60 DTF Printer-Spare Parts



Printhead





OTTER-60ZB Printer Mainboard



Printhead Mainboard



Cap Top



Encoder Strip



Model S 40 DTF Printer-Spare Parts



Printhead



Printer Mainboard



Printhead Mainboard



Cap Top



OTTER-60MG

Ink Tube

OTTER-40MG Ink Tube



OTTER-40GST **Encoder Strip**

Drive Belt

Model S 40/60 DTF Printer-Universal Spare Parts



OTTER-40WKZB Temp. Control Mainboard





OTTER-40GMP



Model M 30 DTF Printer-Spare Parts



M30-PTF1080 Printhead Epson XP600(F1080)



M30-ZB Printhead Main Board





M30-PTZB Printhead Convert Board



Cap Top



Ink Tube



Encoder Strip







Model C 30 UV DTF-Spare Parts



C30-PT3200 Printhead Epson I3200U1HD







C30-PTZB Printhead Main Board









Wiper Blade



DTF Maintenance Solution



(100ml)

DTFPJ-100GQXY DTF Cleaning Solution- Printhead Cleaning



DTFPJ-1000GQXY DTF Cleaning Solution Printhead Cleaning (1000ml)



OT-DTFINKS500OXY Solution



Ultra DTF Cleaning Only for Ultra DTF Ink



DTF Cleaning Solution - Printhead Repair (1000ml)



DTFPJ-1000BSY DTF Moisturizing Solution (1000ml)



CEDTF-BHY500 DTF Moisturizing Solution (500ml)

-•OtterPro

LINT-FREE

DTFPJ-9WCB

(150pcs)

9 x 9in Lint-free Wiper

UV DTF Maintenance Solution



UVDTFPJ-1000BSY UV DTF Moisturizing Solution (1000ml)



UVDTFPJ-1000OXY UV DTF Cleaning Solution (1000ml)



UVDTFPJ-100QXY

(100ml) UV DTF Oil-based Cleaning Solution Washing Solution 1 Cleaning Solution 2 Protection Solution 3



DTFPJ-QJB Cleaning Swab (50pcs)



CEDTFP-ZT

Plastic Syringe



Other Maintenance Supplies

9 x 9in Ultra Soft Lint-free Wiper (100pcs)



DTFPJ-LD Plastic Funnel



DTFPJ-RHZ **Lubricating Grease** (20ml)



DTFPJ-RHY Ultra Lubricating Oil (20ml)

OtterPro DTF ink

Sustainable Inks

OtterPro DTF pigment ink is eco-friendly and waterbased ink, made with non-toxic ingredients that are safe to use and soft to the touch, perfectly in line with our commitment to sustainability.









500ml DTF ink

OT-DTFINK500C (Cyan) OT-DTFINK500M (Magenta) OT-DTFINK500Y (Yellow) OT-DTFINK500K (Black) OT-DTFINK500W (White)



1000ml DTF ink

OT-DTFINK1000C (Cyan) OT-DTFINK1000M (Magenta) OT-DTFINK1000Y(Yellow) OT-DTFINK1000K (Black) OT-DTFINK1000W (White)

OtterPro Ultra DTF Ink

OtterPro Ultra DTF ink is an eco-friendly, water-based ink made with non-toxic ingredients and a special formula. When used with OtterPro Precipitation-Free DTF White Ink, it ensures clog-free printheads and provides smooth, consistent ink flow without settling.













High Density Anti-clog Ink

OT-DTFINKS500Y(Yellow)

OT-DTFINKS500C (Cyan) OT-DTFINKS500M (Magenta)



High Density Anti-clog Ink

OT-DTFINKS1000C (Cyan)
OT-DTFINKS1000M (Magenta)
OT-DTFINKS1000Y(Yellow) OT-DTFINKS1000K (Black)

OT-DTFINKS500K (Black) OT-DTFINKS1000W (White) OT-DTFINKS500W (White)

OtterPro Ink Shaker

Skip the manual shaking! It helps evenly shake DTF ink to avoid precipitation and gives your printheads a longer service life.

Item No.	OT-YMQLB
Power	3.6 W
Voltage	110V-220V 50~60Hz





DTF Powder

OT-DTFRRF500

500g OT-DTFRRF1000

1000g OT-DTFRRF3500



OtterPro

OT-DTFPDT600

600g OT-DTFPDT1000 1000g





Good Wash Durability









No Color Fading

DTF Film

Available Sizes for All DTF Film













60 cm x 100 m 23.6 in x 328 ft

21 cm x 30 cm 8.3 in x 11.8 in

11.8 in x 16.5 in

30 cm x 10 m 30 cm x 100 m 11.8 in x 32.8 ft 11.8 in x 328 ft

Hot & Cold Peel DTF Film DOUBLE-SIDED MATTE

This double-side matte finish DTF printing film offers flexibility-peel it after heat transfer or wait until it cools. Its strong adhesion efficiently absorbs DTF ink, guaranteeing high-definition and vibrant color output.

Size	DOUBLE-SIDED
A3	OT-DTFFILMA3
A4	OT-DTFFILMA4
0.3m*10m	OT-DTFFILM3010
0.3m*100m	OT-DTFFILM30100
0.42m*100m	OT-DTFFILM42100
0.6m*100m	OT-DTFFILM60100





*OtterPro



Glow in Dark COLD PEEL

Add a unique and eyecatching element to your



Gradient Series COLD PEEL

GOLD

Elevate your style with a metallic texture.

Glitter Series COLD PEEL

Let your design shine in the crowd.





GRADIENT









HOLOGRAPHIC

GLITTER SILVER GLITTER GOLD GLITTER RAINBOW


Size	GOLD	GRADIENT	GLITTER SILVER	GLITTER GOLD	GLITTER RAINBOW	HOLOGRAPHIC	GLOW IN DARK
A3	OT-DTFFILMGDA3	OT-DTFFILMJBA3	OT-DTFFILMZSA3	OT-DTFFILMSGA3	OT-DTFFILMXCA3	OT-DTFFILMHCA3	OT-DTFFILMYGA3
A 4	OT-DTFFILMGDA4	OT-DTFFILMJBA4	OT-DTFFILMZSA4	OT-DTFFILMSGA4	OT-DTFFILMXCA4	OT-DTFFILMHCA4	OT-DTFFILMYGA4
0.3m*10m	OT-DTFFILMGD3010	OT-DTFFILMJB3010	OT-DTFFILMZS3010	OT-DTFFILMSG3010	OT-DTFFILMXC3010	OT-DTFFILMHC3010	OT-DTFFILMYG3010
0.3m*100m	OT-DTFFILMGD30100	OT-DTFFILMJB30100	OT-DTFFILMZS30100	OT-DTFFILMSG30100	OT-DTFFILMXC30100	OT-DTFFILMHC30100	OT-DTFFILMYG30100
0.42m*100m	OT-DTFFILMGD42100	OT-DTFFILMJB42100	OT-DTFFILMZS42100	OT-DTFFILMSG42100	OT-DTFFILMXC42100	OT-DTFFILMHC42100	OT-DTFFILMYG42100
0.6m*100m	OT-DTFFILMGD60100	OT-DTFFILMJB60100	OT-DTFFILMZS60100	OT-DTFFILMSG60100	OT-DTFFILMXC60100	OT-DTFFILMHC60100	OT-DTFFILMYG60100

OtterPro UV DTF Transfer AB Film





C3032100CB UV DTF B Film Size: 0.32*100M



OtterPro UV DTF Ink

OtterPro UV DTF ink is a specially formulated oil-based ink that ensures smooth, consistent flow without clogging the printhead. Its high color density delivers rich, vibrant colors for your prints.



500ml UV DTF ink

C30-INK500C (Cyan) C30-INK500M (Magenta) C30-INK500Y (Yellow) C30-INK500K (Black) C30-INK500W (White) C30-INK500V (Vanish)



DTF Printables

DTF technology makes custom prints on cotton fabrics possible and opens up new opportunities for the custom apparel industry. It performs amazingly well on almost all kinds of fabrics, including t-shirts, safety vests, hats, masks, shoes, banners, towels, aprons, bags, slippers, PU notebooks, coasters and more...To learn more about DTF printables, please visit www.otterdtf.com/printables



Blanks for UV DTF

UV DTF printing, no extra processing required! Directly apply your UV DTF sticker onto any hard and smooth surfaces, including tumblers, water bottles, phone cases, coasters, helmets or even materials like glass, wood, metal, plastic and more.



| 42 |